

Q800

High performance Thin Client with Intel Braswell refresh,
1 x LAN, 3 x USB2.0, 2 x USB3.0, 1 x DP and 1 x HDMI



Feature

- System powered on with capacitive touch sensor design without mechanical structure for excellent durability
- Dual display : 1 X HDMI, 1 X DisplayPort
- Support Kensington lock
- Optional VESA mount kit
- Optional WiFi module


Specification

Processor	CPU	Intel Celeron N3060 Dual-Core 1.6GHz up to 2.48GHz (burst frequency)
Memory	RAM	X 1 SO-DIMM socket for DDR3L 1600MHz RAM up to 8GB
Display	Resolution	Up to 3840 X 2160
	Graphic Engine	Intel HD Graphics 400
Audio	Speaker	X 1 (Built-in 2W internal speaker)
Storage		X 1 mSATA eMMC (4GB~32GB Manufacturing option)
I/O Physical	HDMI	X 1
	DisplayPort	X 1
	USB 3.0	X 2 (front)
	USB 2.0	X 3 (rear)
	Mic-in	X 1
Networking	LAN	X 1 (RJ-45, 10/100/1000 Base-T)
	WLAN	(Optional, M.2 2230 E Key)
Other Expansion		TPM Module(option)
Environment	Temperature	Operation 32° to 95° F (0° to 35° C) Storage -4° to 140° F (-20° to 60° C)
	Relative Humidity	20% to 80% non-condensing
Power	Power Supply	24W, DC 12V/2A external power adapter
Mounting	Foot Stand	Vertical
	VESA Bracket	(Optional)
Security	Kensington Lock	Yes
OS support		Windows Embedded Standard 7 / Win10 IoT Enterprise / Linux per request
Physical	Chassis Housing	Plastic and metal
Characteristics	Dimension	Terminal W / Foot stand
Regulatory Compliance		163 (H) X 141.8 (D) X 62.31 (W) mm CE / FCC


Specifications subject to change without notice.

Drawing

Front View

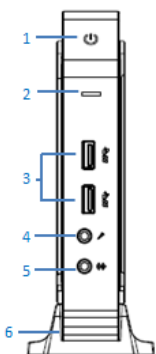

Rear View



Front View

1. Power button
2. Power LED
3. USB 3.0
4. Mic-in
5. Line-out
6. Cradle

Rear View

7. Reserve hole for external antenna
8. RJ45
9. USB 2.0
10. HDMI
11. DisplayPort
12. DC jack
13. Kensington Lock